


OSCILLATING SPRINKLER OS 3.220

Oscillating sprinkler OS 3.220 for watering medium-sized and large areas and gardens. Infinite coverage adjustment. Extremely durable gear drive. Maximum coverage: 220 m²




Order no.

2.645-133.0

Technical data

EAN code		4039784426337
Sprinkling area (2 bar)		45 - 120 m ²
Sprinkling area (4 bar)		80 - 220 m ²
Width of spray (2 bar)	m	9
Width of spray (4 bar)	m	13
Area coverage (2 bar)	m	5 - 14
Area coverage (4 bar)	m	6 - 17
Colour		Black
Weight	kg	0.4
Weight incl. packaging	kg	0.5
Dimensions (L × W × H)	mm	450 × 136 × 86

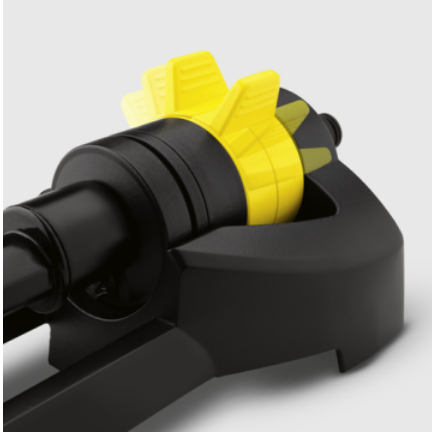

Continuous reach adjustment

- Precise watering.



Loop for hanging the device integrated into the handle

- For simple storage/hanging.



Includes cleaning needle

- For easy cleaning of the nozzles

COMPATIBLE MACHINES

- Watering Unit WT 4
- Watering clock WT 2

ACCESSORIES FOR OSCILLATING SPRINKLER OS 3.220
2.645-133.0



		Order no.	Description	
HOSES				
PrimoFlex® hose 1/2" - 20 m	1	2.645-138.0	The PrimoFlex® (1/2") flexible garden hose is 20 m long, temperature-resistant, comes with pressure-resistant reinforcement technology and contains no substances that are harmful to health. Bursting pressure: 24 bar.	☐
HOSE CONNECTION SYSTEMS				
Universal Hose Connector with Aqua Stop	2	2.645-192.0	Universal hose coupling with Aqua Stop. Ergonomic design for convenient handling.	☐
G3/4 tap adaptor with G1/2 reducer	3	2.645-006.0	Extremely tough tap connector 3/4" thread with 1/2" thread reducer. The reducer allows connection to two thread sizes. Compatible with all click systems.	☐
Universal Hose Connector	4	2.645-191.0	Ergonomically designed universal hose coupling for convenient handling.	☐

■ Included in the scope of supply. ☐ Available accessories. ☐ Detergents.