




Product data sheet

Power tools for trade & industry

Line Laser

GLL 3-80 C Professional

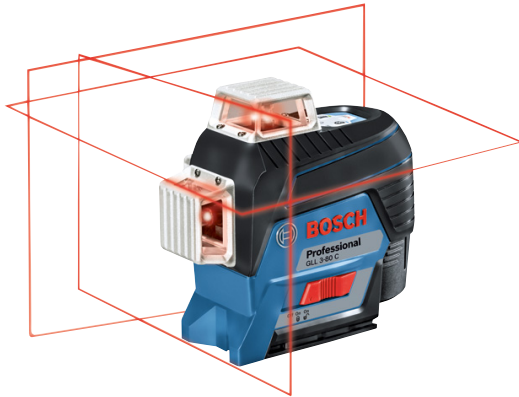

from GBP 508.64*

* Price including VAT

Visibility on a new level in 3 x 360°. Simply Connected.

The most important data

Working range with receiver	120 m
Working range	30 m
Accuracy	± 0.2 mm/m

Part number: 0 601 063 R00

[> More product information](#)

Technical Data

Performance data

Laser diode	Line: 630 - 650 nm, < 10mW
Operating temperature	-10 – 40 °C
Storage temperature	-20 – 70 °C
Laser class	2
Working range	30 m
Working range with receiver	120 m
Working range without receiver	30 m
Accuracy	± 0.2 mm/m
Self-levelling range	± 4°
Levelling time	4 s
Dust and splash protection	IP 54
Operating time (max.)	8 h (Li-Ion) and 6 h (4 x AA) in 3-line mode
Tripod thread	1/4", 5/8"
Colour of laser line	red
Projection	3 x 360° line
Compatible laser receivers	LR 6 + 7

Size and weight

Weight, approx.	0.9 kg
-----------------	--------

**BOSCH**

Invented for life

Product data sheet

Power tools for trade & industry

Advantages

- High precision due to the innovative CAL Guard monitoring and Bluetooth® connection to your smartphone for remote control use and contactless adjustment of the tool
- High visibility due to high power diodes
- High work efficiency due to 3 x 360° lines: Simultaneous performance of horizontal and vertical levelling applications in the entire room with only one tool
- Dual Power Source: Can be operated both with 12 V LI-ion battery and with standard alkaline batteries
- Self-levelling ($\pm 4^\circ$ in <4 sec), very precise (± 0.2 mm/m) and range of up to 120 m with LR 6 or LR 7 Professional receiver (optional)
- Compact, easy to handle and extremely robust (IP54)

