

Verbatim LED Tube T8 G13 1200mm 22W 1950lm 4000K

- G13 Socket
- 220-240V
- 40,000 hours Lifetime
- Luminous Flux: 1950 lm


Product Number	52701
General Data	
Lamp Socket	G13
Design	LED T8 Tube
Electric Data	
Wattage (W)	22
Voltage (V)	220-240
Dimmable	no
Power Factor	0.90
Operating Frequency (Hz)	50-60
Geometric Data	
Length (mm)	1213
Diameter (mm)	28 x 32
Weight (g)	350
Photometric Data	
Luminous Flux (lm)	1950
CRI	80
CCT (K)	4000
Beam Angle (°)	120
Luminous Efficacy (lm/W)	88.64
Lifetime (hrs)	40,000
Switching Cycle	100,000
Operating Temperature	-35 ℃ 45℃




Product image




Technical drawing



Application image

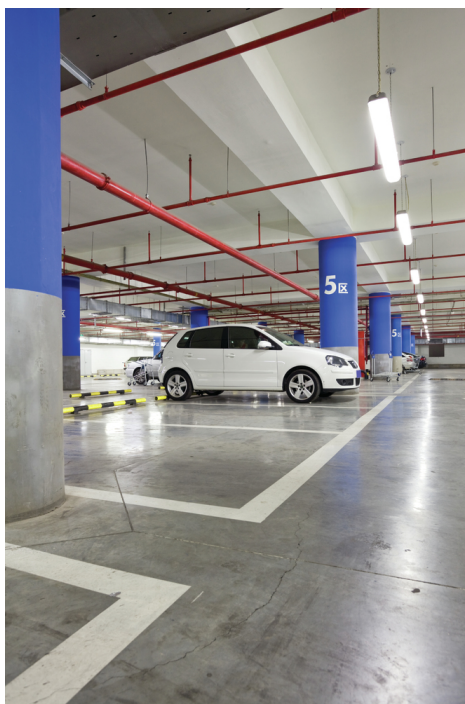

Energy Rating

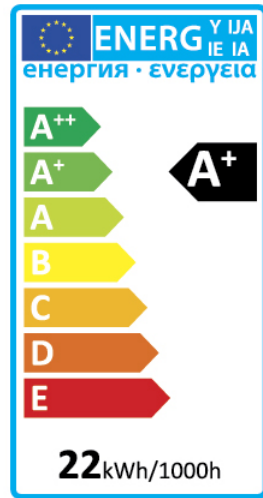

Technical Packaging Details

Barcode

023942527015

EAN 128

(02)00023942527015(37)04(91)803

EAN 14

50023940527010

Pack Dimensions(HxWxL)

35 x 33 x 1295 (mm)

Pack Weight

480 (g)

MOQ

10

Carton Dimensions (HxWxL)

90 x 180 x 1325 (mm)

Cartons/Pallet

36

Layers/Pallet


9

Units/Pallet

360



Photometric Diagrams

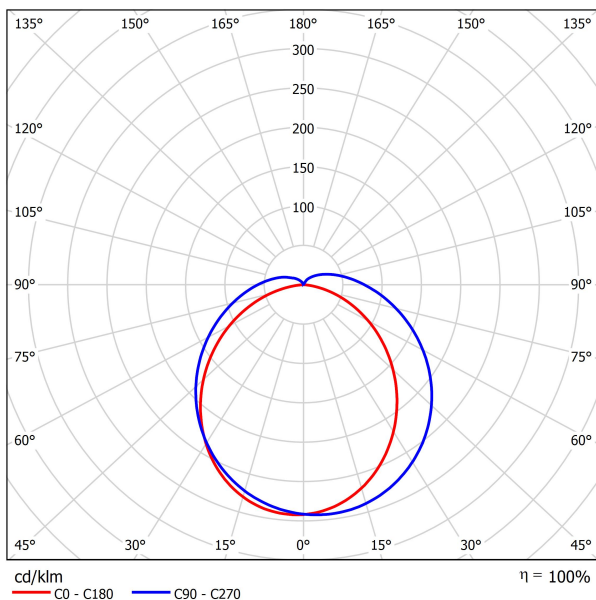

0.5	1.39 1.15	E(0°) 2270 E(C90) 54.2° 227 E(C0) 49.0° 321
1.0	2.77 2.30	E(0°) 568 E(C90) 54.2° 57 E(C0) 49.0° 80
1.5	4.16 3.45	E(0°) 252 E(C90) 54.2° 25 E(C0) 49.0° 36
2.0	5.55 4.60	E(0°) 142 E(C90) 54.2° 14 E(C0) 49.0° 20
2.5	6.93 5.75	E(0°) 91 E(C90) 54.2° 9 E(C0) 49.0° 13
3.0	8.32 6.90	E(0°) 63 E(C90) 54.2° 6 E(C0) 49.0° 9
Distance [m] Cone Diameter [m]		Illuminance [lx]
— C0 - C180 (Half-value Angle: 98.0°)		
— C90 - C270 (Half-value Angle: 108.4°)		