


ELECTRICAL TEST:


- 1.100% OPEN SHORT MIS WIRE TEST
- 2.CONTACT RESISTANCE:3 OHM MAX
- 3.INSULATION RESISTANCE:5M OHM MIN
- 4.HI-POT TEST:DC 300V/10ms
- 5.PASS 4K@60HZ/ TEST

CUSTOMER ITEM	LENGTH(mm)
	1000±30
	2000±30
	3000±30
	5000±50

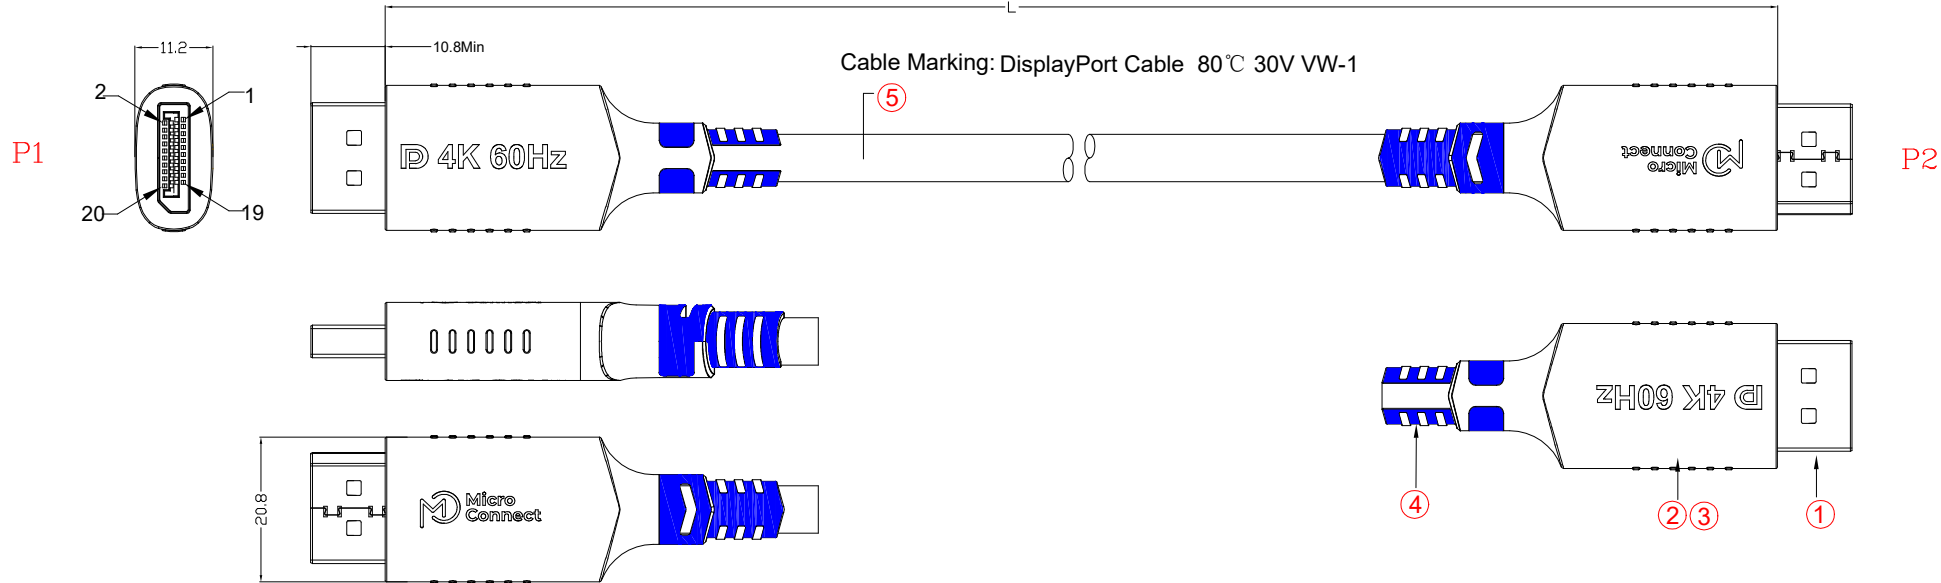

PIN Assignment

P1	P2
1	12
3	10
2	11
4	9
6	7
5	8
7	6
9	4
8	5
10	3
12	1
11	2
15	15
17	17
16	16
13	13
14	14
18	18
19	19
SHELL	SHELL

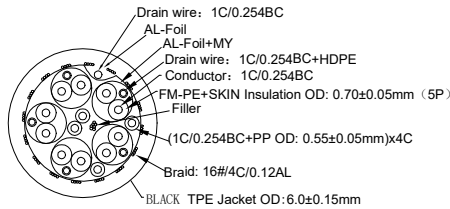

⑤	Cable	DP1.2(1/0.254BC*1P+1/0.254BC+AL-Foil+MY)*5C+1/0.25BC*4C +D1/0.254BC+64#/0.12AL Black TPE Jacket OD:6.0±0.15mm	M
④	SR	Blue detachable SR (Pantone 7462),Material(PP+PE)	g
③	Outer mold	TPE 85A BLACK	g
②	Inner mold	PE,Nature color	g
①	Connector	DP M PIN:G/F, gold-plated iron head without Lock	2pcs
NO.	PART NAME	DESCRIPTION	UNIT

Micro Connect® Reliable Connectivity			DESCRIPTION	FINISHED PRODUCT'S FIGURE	SCALE	FIT	UNITS: MM	1RD ANGLE
APPROVED	CHECKED	DRAWING	MODEL NO.		△			
Lin	Cai	C.Y.C	DRAWING NO.		△			
			FINISHING		△	2025/05/06		A0
			MATERIAL		SYM	DATE		REVISION