


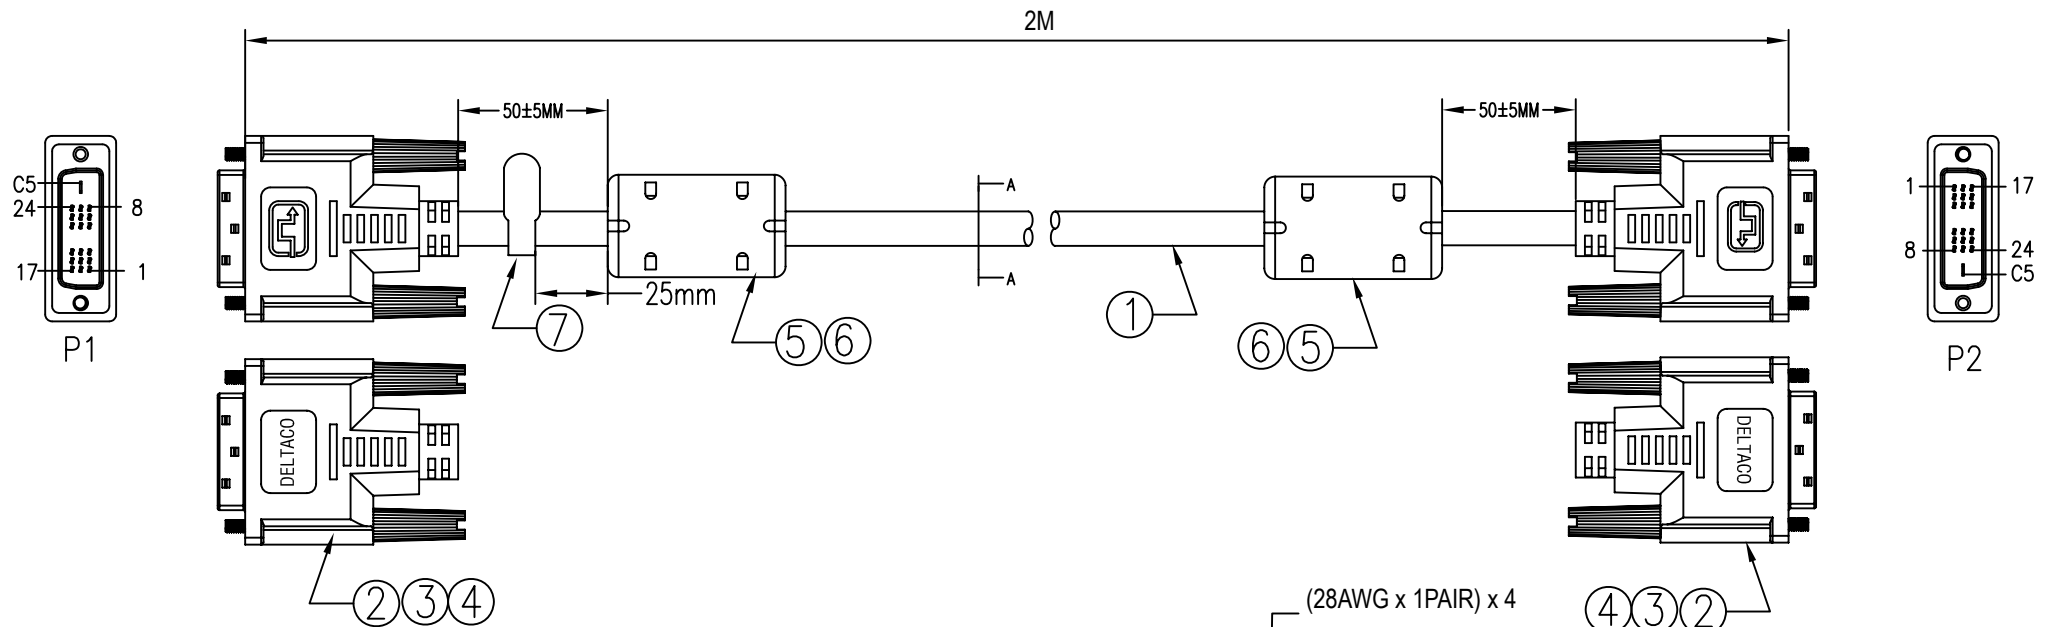

NOTES:

1.ELECTRICAL PROPERTIES:


- 1.1 100% OPEN AND SHORT TEST
- 1.2 CONDUCTOR RESISTANCE: 5 OHMS
- 1.3 INSULATION RESISTANCE: 10 MEGOHMS
- 1.4 HI-POT: DC300V/0.01S
- 1.5 100% HDTV, BLUE RAY DVD TEST(1080P:UP TO 7M);
(1080I: 10M,15M)
- 1.6 ALL CABLE PRODUCTION PROCESS ARE CONTROLLED
BY ATC TEST DEVICE.

2. ALL MATERIAL BE RoHS COMPLIANT.

PIN OUT

P1	P2
1	1
2	2
3	3
9	9
10	10
11	11
17	17
18	18
19	19
23	23
24	24
22	22
6	6
7	7
14	14
15	15
16	16

SHELL Braid SHELL

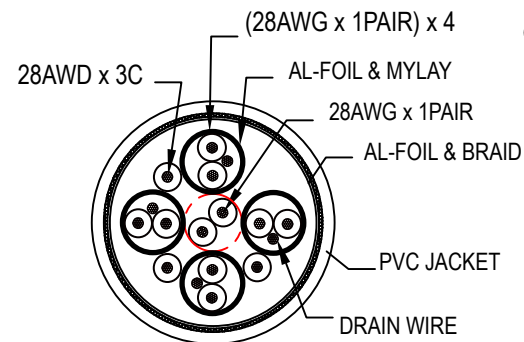

⑦	TAG	1PCS	DELTACO TAG
⑥	CORE MOLD	2PCS	BLACK PVC
⑤	CORE	2PCS	OD*ID*L: 14.3*9.0*28.5mm
④	SCREW	2PCS	#4-40 UNC, HOOD MOLDED: BLACK PVC
③	DVI HOOD	2PCS	BLACK PVC
②	DVI(18+1)M	2PCS	GOLD PLATED SHELL
①	CABLE	1PCS	(28AWG*1P+D+FAM)*4+28AWG*1P+28AWG*3C +AEB OD:7.3mm BLACK PVC JACKET
NO.	PARTS NAME	Q'TY	SPECIFICATION

APPROVED	CHECKED	DRAWN	CUSTOMER:	
			ITEM NO.	VE011-A-K
			DRAW NO.	
			UNIT	mm
			SCALE	NONE

DESCRIPTION:

DVI(18+1)/M-DVI(18+1)/M

