

Memory Module Specifications

KF572RH38RB-16

16GB 1Rx8 2G x 80-Bit

PC5-7200 CL38 Registered EC8 288-Pin DIMM



DEFAULT SPECIFICATIONS

CL	52 cycles
Row Cycle Time (tRCmin)	48ns(min.)
Refresh to Active/Refresh Command Time (tRFCmin)	295ns(min.)
Row Active Time (tRASmin)	32ns(min.)
Row Precharge Time (tRPmin)	16ns(min.)
UL Rating	94 V - 0
Operating Temperature	0° C to +95° C
Storage Temperature	-55° C to +100° C

DESCRIPTION

Kingston FURY KF572RH38RB-16 is a 2G x 80-bit (16GB) DDR5-7200 CL38 SDRAM (Synchronous DRAM) 1Rx8, ECC memory module, based on ten 2G x 8-bit FBGA components per module. The module supports Intel® Extreme Memory Profiles (Intel® XMP) 3.0 and AMD® EXPO v1.1. Each module has been tested to run at DDR5-7200 at a low latency timing of 38-50-50 at 1.4V. The SPDs are programmed to JEDEC standard latency DDR5-6400 timing of 52-52-52 at 1.1V. Each 288-pin DIMM uses gold contact fingers. The JEDEC standard electrical and mechanical specifications are as follows:

DEFAULT FEATURES





- Power Supply: VDD = 1.1V Typical
- VDDQ = 1.1V Typical
- VPP = 1.8V Typical
- VDDSPD = 1.8V to 2.0V
- On-Die ECC
- x80 ECC (x40, 2 independent I/O sub channels)
- 32 internal banks
- Hard/Soft Post Package Repair
- Sideband access with I3C/I2C
- PCB: Height 1.23" (31.25mm)
- RoHS Compliant and Halogen-Free

FACTORY TIMING PARAMETERS

- Default (JEDEC): DDR5-6400 CL52-52-52 @1.1V
- EXPO Profile #0: DDR5-7200 CL38-50-50 @1.4V
- EXPO Profile #1: DDR5-6800 CL36-48-48 @1.4V
- XMP Profile #1: DDR5-7200 CL38-50-50 @1.4V
- XMP Profile #2: DDR5-6800 CL36-48-48 @1.4V

Continued >>

MODULE DIMENSIONS

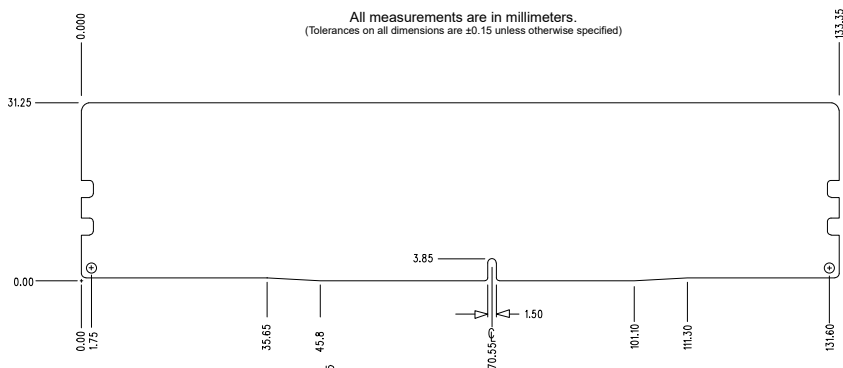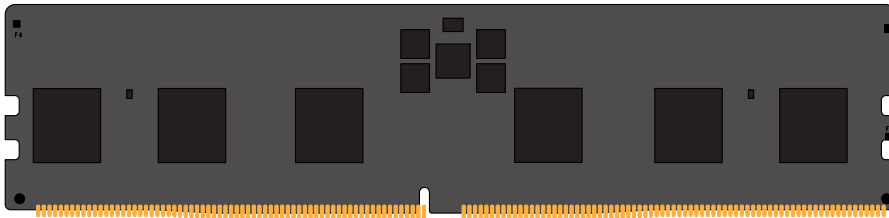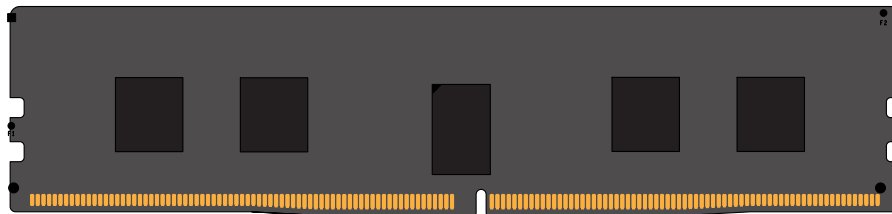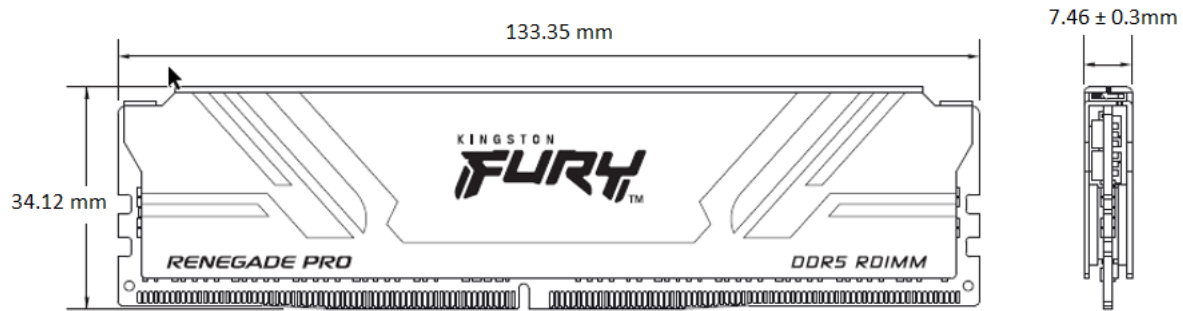

The product images shown are for illustration purposes only and may not be an exact representation of the product. Kingston reserves the right to change any information at anytime without notice.

FOR MORE INFORMATION, GO TO KINGSTON.COM

All Kingston products are tested to meet our published specifications. Some motherboards or system configurations may not operate at the published Kingston FURY memory speeds and timing settings. Kingston does not recommend that any user attempt to run their computers faster than the published speed. Overclocking or modifying your system timing may result in damage to computer components.