



AURORA PLUS 2.4G & BT WIRELESS CONTROLLER

USER MANUAL

FEATURES

- Universal Mobile Adapter Included
- RGB Customization
- Built-In Bluetooth®
- 2.4G Dongle Included
- Wired Compatibility
- Vibration Motors
- Turbo Function
- Battery Capacity: 800mAh
- Long Hours Gaming Experience
- 2m Cable For Extended Reach



TURN OFF THE CONTROLLER

Press and hold the Home button for 5 seconds, controller now is off.

PAIRING STEPS

***Important - For BT wireless connection, only compatible with the devices with BT function.**


For PC

Wireless 2.4G Dongle


1 Turn off the controller.




2 Plug the USB Dongle to your PC device, now USB Dongle LED flashes.

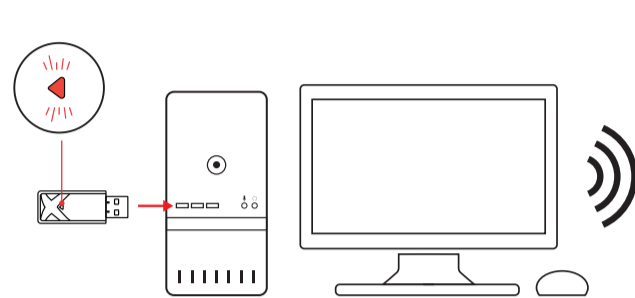

3 Press and hold '2.4G Dongle pairing' button for 3-5 seconds, Home button LED flashes, now the controller is in pairing mode.

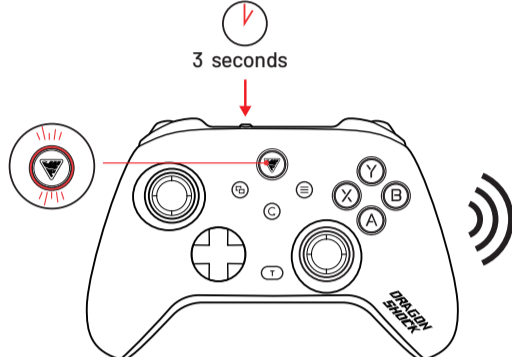

4 Controller vibrates for a second, Dongle LED & All LEDs light up and stay on. Now controller is connected successfully with the PC device.

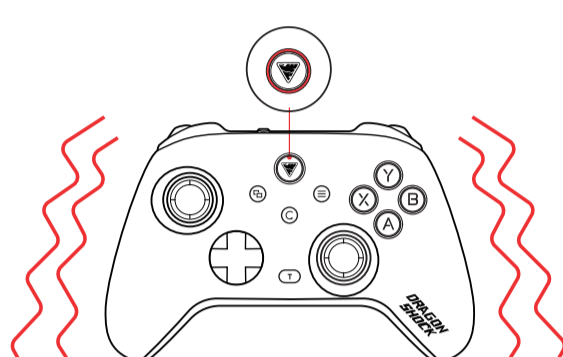

Wireless BT

- Turn off the controller.
- Press and hold 'Y + Home' buttons at the same time for 3-5 seconds, Home button LED starts flashing. The controller is now in pairing mode.
- Search for 'Aurora PC Controller' on your Bluetooth device and select it for connection.
- Once connected, all LEDs light up & stay on. Now the controller is connected successfully with the device.

Wired

- Use the provided Type-C cable to connect the controller and PC.
- Once connected, controller vibrates once & all LEDs light up and stay on.
- The controller now is connected successfully with the device and the controller is recognized as a X-input device.

Switch to D-input Mode

- Press and hold -(Select) and + (Starts) buttons for 3-5 seconds.
- Now the controller is with D-input, the LEDs light behavior remains the same.
 - X-INPUT: XBOX 360 Controller for Windows
 - D-INPUT: Aurora PC Controller

For Mobile

Wireless BT / Android


- Turn off the controller.
- Press and hold 'A + Home' buttons at the same time for 3-5 seconds, Home button LED starts flashing. The controller is now in pairing mode.
- Search for "Aurora PC Controller" on your Bluetooth device and select it for connection.
- Once connected, all LEDs light up & stay on. Now controller is connected successfully with the device.

Wireless BT / iOS


- Turn off the controller.
- Press and hold 'LB + Home' buttons at the same time for 3-5 seconds, Home button LED starts flashing. The controller is now in pairing mode.
- Search for "DUALSHOCK 4 Wireless Controller" on your Bluetooth device and select it for connection.
- Once connected, all LEDs light up & stay on. Now controller is connected successfully with the device.

APPLY THE MOBILE CLIP


1 Align the lips with the slots.

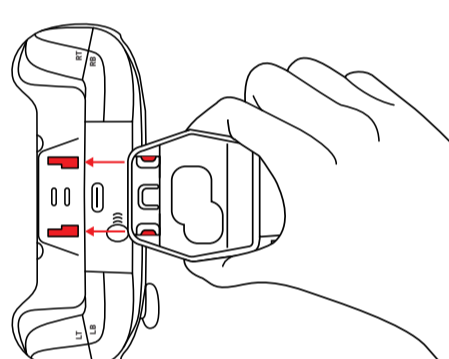


2 Push the clip to lock.

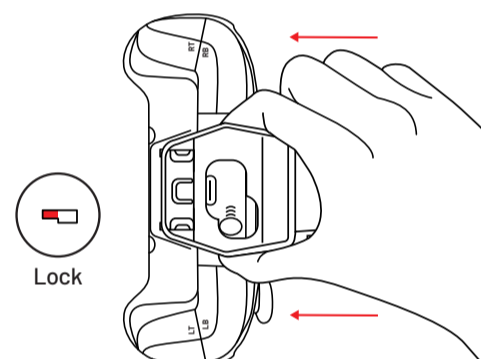

3 The clip is adjustable for varies angles.

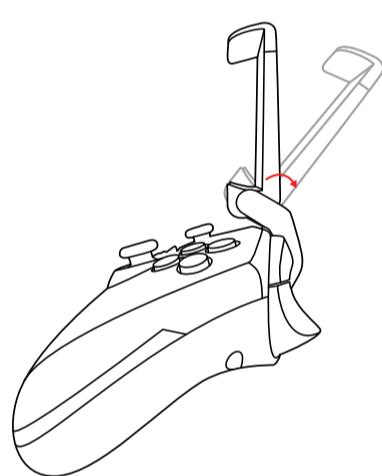


4 The clip is extendable for different size of mobile devices.

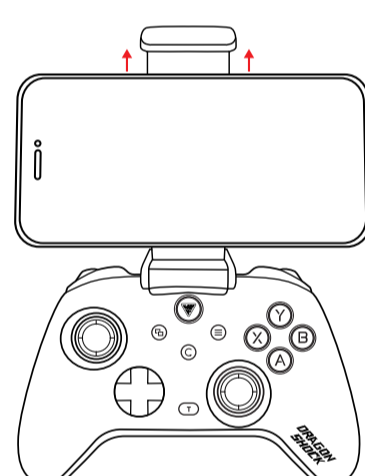


REMOVE THE MOBILE CLIP


1 Adjust the clip to horizontal angle.

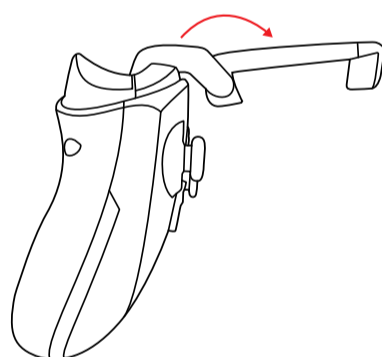


2 Hold the body of the clip.

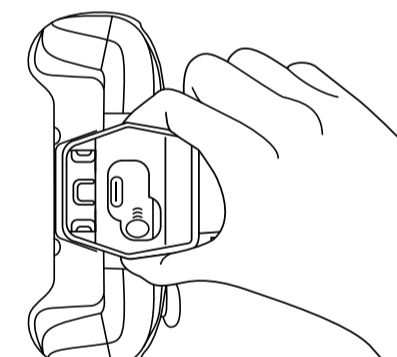

3 Move the clip back and forth to release.

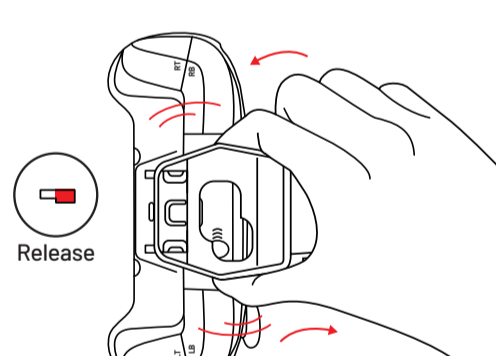

4 Remove the clip.

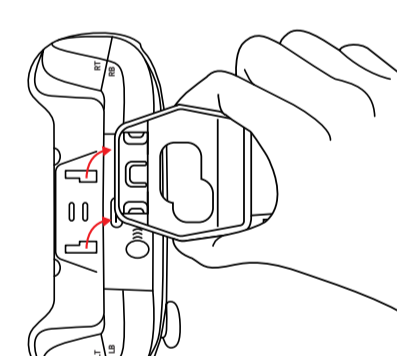

For Android TV

Wired

- Use the provided Type-C cable to connect the controller and TV.
- Once connected, all LEDs light up & stay on. Now controller is connected successfully with the device.

Reconnecting

Once the controller has been paired with the device once, you do not need to re-pair the device again. When the controller is off, simply press Home button to reconnect.

RGB LEDS CONTROL

- Press the 'Set' button on the back of the controller to choose preferred colour: RGB MIX WAVE, BLUE, RED, GREEN, PINK, ORANGE, CYAN, PURPLE, OFF.
- The controller memorises the last LED settings.

TURBO

Support buttons: ABXY, LT / LB, RT / RB, D-pad

Setup: Example, set LB as Turbo.

Shoot: Press and hold 'T + LB'.

Auto shoot: Press and hold 'T + LB', 2nd time.

Clear turbo: Press and hold 'T + LB', 3rd time.

T Turbo + LB

Clear all Turbo functions: Press and hold 'Clear + -'.

Clear Button + - (Select)

SPEED ADJUSTMENT

High

Press and hold the Turbo button, and press R3 towards up direction.

T Turbo + R3 ↑

Low

Press and hold the Turbo button, and press R3 towards down direction.

T Turbo + R3 ↓

CHARGING LED INDICATOR

Charge when controller is on

- Home button LED in blue and flashes slowly
- LED goes off when is fully charged

Charge when controller is off

- Home button LED in blue and flashes slowly
- LED stops flashing and stays on in blue

FIRMWARE UPDATE

- Firmware update instruction available on www.dragonshock.com.
- Find and select 'Aurora PC Controller'.
- Click 'Download' and follow the instructions on the screen.

RESET

If you experience the controller dysfunctional, please reset the controller. Please use a pin, press and hold on the small hole on the back of the controller for 3-5 seconds.

SPECIFICATION

*Design and specifications are subject to change without notice.

Type-C charging cable	2m
Wireless connection	Bluetooth & 2.4G
2.4G transmission distance	≤ 8m
Battery type	Li-ion
Battery capacity	800mAh
Charging hour	3H
Play hour	≥8H

Input power rating	0.35W
Voltage	5V
Operating temperature	0°C --- 45°C
Radio frequency	ISM 2.4G
Frequency band	2402 --- 2480MHZ
Maximum radio-frequency	5dbm
Mass	Approx. 265±5g