

PowerWalker MBS/PDU IEC 1-3kVA

Maintenance Bypass Switch

Allows to disconnect UPS for service

8x IEC 10A and 1x IEC 16A outlets

Distributes power to many loads

Wall-mounting or desktop use flexibility

Supports all UPS up to 3000 VA




Item-No. 10120500

Product Features

PowerWalker MBS is used as an external power distribution unit in conjunction with UPS systems or large-scale voltage regulators. It allows to manually transferring the connected equipment to utility power via a bypass switch, permitting scheduled maintenance or UPS replacement without power interruption. Combined power distribution feature and the master/slave controlled design; it provides maintenance bypass function and power saving within a compact mechanism.

Supports all VFD, VI and VFI models up to 3000VA.

- Provides continuous power to connected equipment during UPS maintenance
- Easy operation with simple rotary switch
- Plug-and-play connectivity for both input and output
- Suitable for all UPS up to 3000 VA

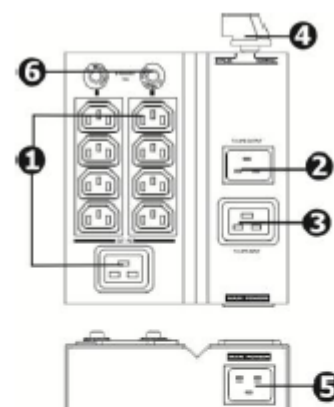

- 1 Output receptacle
- 2 Socket to UPS output
- 3 Socket to UPS input
- 4 Bypass switch
- 5 AC input
- 6 Circuit breaker

Technical Details

Product Features

Current Rating	16A
Voltage Rating	208/220/230/240VAC

Connections

Input	1x IEC 16A (with cable included)
Output to UPS	1x IEC 16A
Input from UPS	1x IEC 16A
Output	8x IEC 10A +1x IEC 16 outlets
Protection	Two circuit breakers

Product Details

Dimensions	180mm x 160mm x 50mm (D x W x H)
Colour	Black
Weight	1.3kg
Model Code	MBS/PDU IEC 1-3kVA

Available accessories

Environment

Temperature	0°C – 45°C
Humidity	20% - 90% RH (non- condensing)

Package Content

Package Content	PowerWalker MBS, input cable, manual
------------------------	--------------------------------------

Logistic Data

Giftbox Language	EN
Manual Language	EN
Dimension/Giftbox	tbc
Weight/Giftbox	1.5kg
Dimension/carton	tbc
Weight/carton	
Pieces/carton	
Pieces/palette	
Item Number	10133000
EAN-Code	4260074978025
Warranty	24 Months (except battery)



Schuko Input -> IEC C19
Item Nr.: 91010018



Schuko Input -> IEC C13
Item Nr.: 91010017

Swiss Input -> IEC C19



IEC C19 -> IEC C20
Item Nr.: 91010028



IEC C13 -> IEC C20
Item Nr.: 91010041



IEC C14 -> IEC C19
Item Nr.: 91010040



IEC C14 -> Schuko
Converter
Item Nr.: 91015003



IEC C13 -> IEC C14
Item Nr.: 91010013

Version: EN 19/11/2015

We reserve the right for technical changes and mistakes