

NT 65/2 TACT²

The Kärcher Tact² systems are ever popular as specialist systems and as all-rounders thanks to their high level of mobility and excellent performance, their solid construction and their wide range of practical design features. The NT 65/2 Tact² is supplied with the entire antistatic package as standard. The system tackles even large amounts of fine dust.



Order no. 1.667-286.0

- Automatic Filter Cleaning System Tact²
- Anti-static system
- Adjustable push handle


Technical data

EAN code		4039784714953
Supply voltage	Ph / V / Hz	1 / 220 - 240 / 50 - 60
Air flow	l/s	2 × 74
Vacuum	mbar / kPa	254 / 25.4
Container content	l	65
Container material		Plastic
Rated input power	W	max. 2760
Standard nominal width		ID 40
Cable length	m	10
Sound pressure level	dB(A)	73
Colour		anthracite
Weight without accessories	kg	24.5
Weight incl. packaging	kg	31.3
Dimensions (L × W × H)	mm	575 × 490 × 880

Equipment


Suction hose length	m	4
Suction hose type		electrically conductive
Bend		electrically conductive
Quantity of suction tubes	Piece(s)	2
Suction tubes length	mm	550
Suction tubes material		Stainless steel
Wet/dry floor nozzle width	mm	360
Crevice nozzle		■
Drain hose (oil-resistant)		■
Automatic cut-out features at max. filling quality		■
Anti-static system		■
Flat pleated filter		Paper
Filter cleaning		Automatic Filter Cleaning System Tact ²
Sturdy bumper		■
Push handle		■
Protection class		I
Stop swivel castor		■

■ included in the scope of supply.

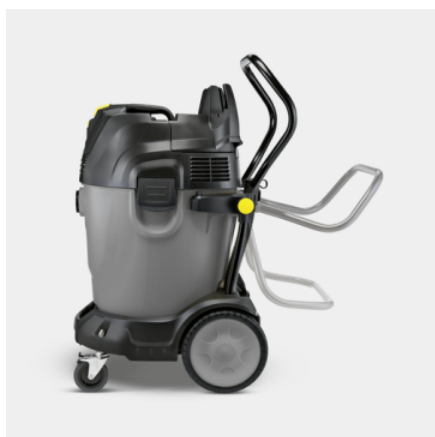


Easy to transport

- Adjustable push handle and large wheels make transport easy even on uneven surfaces.

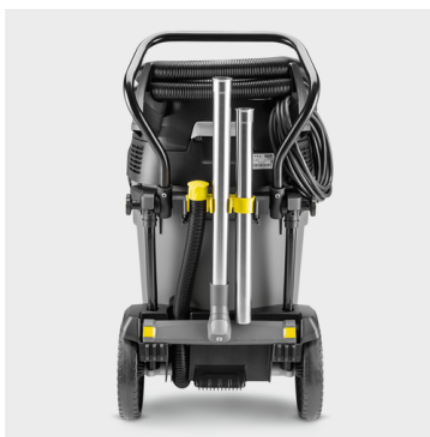

Intelligent accessory storage

- For example, the floor nozzle can be quickly fixed any way round.

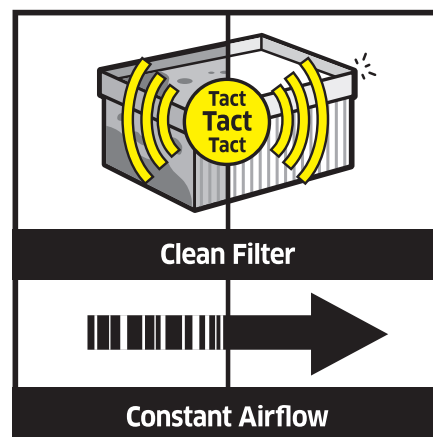

Automatic Filter Cleaning System Tact²

- The flat pleated filter can be removed from the clean side; it is divided into two halves, which are cleaned alternately by targeted blasts of air.
- Fine dusts cannot block the filter. A constant high air flow is maintained.
- Over 1000 kg of category A fine dust can be vacuumed without the need to change the filter.

ACCESSORIES FOR NT 65/2 TACT²

1.667-286.0



		Order no.	Description	
FLAT PLEATED FILTER, STANDARD, BIA C OR UP TO DUST CLASS M				
Flat pleated filter, paper				
Flat pleated filter, paper	1	6.907-276.0	Flat pleated filter dust class M, nano-coated paper. Suitable for fine dust and dry dirt pick up.	■
Flat pleated filter, PES				
Flat pleated filter, PES	2	6.907-277.0	Flat pleated filter dust class M, rotproof PES fleece. Suitable for frequent wet pick up.	□
Flat pleated filter, PTFE				
Flat pleated filter, PTFE	3	6.907-449.0	Polyester fleece with PTFE coating, dust class M, for Tact ² vacuum cleaners. Particularly suitable for very adhesive materials.	□
BENDS				
Bend, plastic				
Bend, NT, DN 40, plastic, electrically conductive, clip 2.0 at hose end, cone at accessory end	4	2.889-172.0	Electrically conductive DN 40 plastic bend for wet and dry vacuum cleaners. Equipped with a clip 2.0 connection at the hose end and a cone connection at the accessory end.	■
Bend, NT, DN 35, plastic, clip 1.0 at hose end, cone at accessory end	5	5.031-718.0	DN 35 plastic bend for wet and dry vacuum cleaners. Equipped with a clip 1.0 connection at the hose end and a cone connection at the accessory end.	□
Bend, NT, DN 35, plastic, electrically conductive, clip 1.0 at hose end, cone at accessory end	6	5.031-939.0	Electrically conductive DN 35 plastic bend for wet and dry vacuum cleaners. Equipped with a clip 1.0 connection at the hose end and a cone connection at the accessory end.	□
Bend, NT, DN 40, plastic, electrically conductive, clip 1.0 at hose end, cone at accessory end	7	5.032-427.0	Electrically conductive DN 40 plastic bend for wet and dry vacuum cleaners. Equipped with a clip 1.0 connection at the hose end and a cone connection at the accessory end.	□
Bend, other				
Bend, NT, DN 35, chrome-plated metal, cone at hose end, cone at accessory end	8	6.900-519.0	DN 35 chrome-plated metal bend for wet and dry vacuum cleaners by Kärcher. The bend has a cone connection at both the hose end and the accessory end.	□
Bend, NT, DN 35, stainless steel, cone at hose end, cone at accessory end	9	6.903-141.0	Robust DN 35 stainless steel bend for wet and dry vacuum cleaners by Kärcher. The bend has a cone connection at both the hose end and the accessory end.	□
Bend, NT, DN 40, chrome-plated metal, cone at hose end, cone at accessory end	10	6.900-276.0	DN 40 chrome-plated metal bend for wet and dry vacuum cleaners by Kärcher. The robust bend has a cone connection at both the hose end and the accessory end.	□
Bend, NT, DN 40, stainless steel, cone at hose end, cone at accessory end	11	6.902-079.0	Robust DN 40 stainless steel bend for wet and dry vacuum cleaners by Kärcher. The bend has a cone connection at both the hose end and the accessory end.	□
SUCTION NOZZLES				
Floor nozzles				
Wet/dry floor nozzle, Adv, DN 40, width 360 mm	12	2.889-153.0	Plastic Adv floor nozzle with width of 360 mm and nominal size of DN 40 for wet and dry vacuum cleaners from Kärcher. Features brush strips and squeegees that are easy to change.	■
Wet/dry floor nozzle, DN 35, width 300 mm	13	2.889-173.0	Plastic floor nozzle in nominal size DN 35 for wet and dry vacuuming of fine dust, coarse dirt or liquids. Features brush strips and squeegees. Width: 300 mm.	□
Wet/dry floor nozzle, DN 40, width 360 mm	14	2.889-174.0	Plastic floor nozzle with width of 360 mm and nominal size of DN 40 for wet and dry vacuuming of fine dust, coarse dirt or liquids. Features brush strips and squeegees.	□

■ Included in the scope of supply. □ Available accessories.

ACCESSORIES FOR NT 65/2 TACT²

1.667-286.0



		Order no.	Description	
SUCTION NOZZLES				
Floor nozzles				
Wet/dry floor nozzle, aluminium, DN 40, width 370 mm	15	6.903-018.0	Aluminium floor nozzle with rollers, width of 370 mm and nominal size of DN 40 for wet and dry vacuum cleaners from Kärcher. Includes easy-to-replace brush strips and squeegees.	☐
Wet/dry floor nozzle, aluminium, DN 40, width 450 mm	16	6.906-383.0	Aluminium floor nozzle with rollers, width of 450 mm and nominal size of DN 40 for wet and dry vacuum cleaning. The brush strips and squeegees that are included are easy to change.	☐
Wet/dry floor nozzle, aluminium, DN 35, width 370 mm	17	6.906-384.0	For wet and dry vacuum cleaners from Kärcher: aluminium floor nozzle (DN 35) with a width of 370 mm, including brush strips and squeegees that are easy to change.	☐
Wet/dry floor nozzle, Adv, DN 40, width 400 mm	18	2.889-117.0	For wet and dry vacuum cleaners from Kärcher: plastic Adv floor nozzle with width of 400 mm and nominal size of DN 40. Includes easy-to-replace brush strips and squeegees.	☐
Crevice nozzles				
Crevice nozzle, NT, DN 40, plastic, 300 mm	19	5.130-655.0	Plastic crevice nozzle in nominal width DN 40 for Kärcher wet and dry vacuum cleaners. Especially suitable for vacuuming out areas that are difficult to reach, such as joints, crevices and corners.	☒
Crevice nozzle, DN 35, plastic, length 210 mm	20	2.889-130.0	With the DN 35 plastic crevice nozzle, corners and crevices can be vacuumed quickly and thoroughly. Length: 210 mm.	☐
Crevice nozzle, NT, DN 35, metal, 500 mm long	21	6.900-922.0	The metal crevice nozzle (DN 35) enables vacuuming in crevices and corners. Length: 500 mm.	☐
Crevice nozzle, NT, DN 40, metal, 400 mm	22	6.905-817.0	Metal crevice tool (DN 40) for vacuuming in crevices and corners. Length: 400 mm.	☐
All-purpose brushes				
All-purpose brush	23	6.903-863.0	Natural bristles (ox hair), bristle element 120 × 45 mm.	☐
Car cleaning nozzles				
Car nozzle, ID 40, 90 mm	24	6.900-952.0	For retrofitting older Kärcher wet and dry vacuum cleaner models with bends in DN 40: Flat angled, convenient, plastic car cleaning nozzle with a working width of approx. 90 mm.	☐
	25	2.840-095.0	Flat angled, convenient, plastic, DN 40 car cleaning nozzle specially designed for new Kärcher wet and dry vacuum cleaners with a clip system at the suction hose. Working width: Approx. 90 mm.	☐
Rubber suction tools, nose 45°				
Rubber suction tool, nose 45°	26	6.902-104.0	45° rubber suction nozzle (DN 35), oil-resistant and suitable for vacuuming machines. Only for NT vacuum cleaners.	☐
NT rubber suction nozzle, bevelled at 45°, DN 40	27	6.902-105.0	45° rubber suction nozzle (DN 40), oil-resistant and suitable for vacuuming machines. Only for NT vacuum cleaners.	☐
Pipe dusting nozzles				
Pipe brush 35/100	28	6.903-035.0	Plastic, pipe diameter 100 mm	☐

■ Included in the scope of supply. □ Available accessories.

ACCESSORIES FOR NT 65/2 TACT²

1.667-286.0



		Order no.	Description	
SUCTION NOZZLES				
Pipe dusting nozzles				
Pipe brush 35/200	29	6.903-036.0	Plastic, pipe diameter 200 mm	☐
SUCTION TUBES				
Suction tubes, stainless steel				
Suction tube, 2 x, NT, DN 40, 550 mm long, stainless steel, suitable for: NT 50/1, NT 55/2, NT 65/2, NT 70/2, NT 70/3, NT 75/2	30	2.889-194.0	The suction tube set consists of 2 suction tubes made of high-quality stainless steel (DN 40 and 550 mm long each). For Kärcher wet and dry vacuum cleaners.	■
Suction tube, DN 35, 505 mm, stainless steel	31	6.902-154.0	Suction tube made of high-quality stainless steel in DN 35 and 505 mm long for wet and dry vacuum cleaners from Kärcher.	☐
Suction tube, NT, DN 40, 550 mm long, stainless steel, suitable for: AP 100/50, NT 55/2, NT 65/2, NT 70/2, NT 70/3, NT 72/2, NT 75/2, NT 561, NT 611, NT 802 IV	32	6.902-081.0	Suction tube made of high-quality stainless steel in nominal width DN 40 and 550 mm long for wet and dry vacuum cleaners from Kärcher.	☐
Suction tube, NT, DN 40, 1000 mm long, stainless steel, suitable for: NT 55/2, NT 65/2, NT 70/2, NT 70/3, NT 72/2, NT 75/2, NT 561, NT 611, NT 802 IV	33	6.906-531.0	The suction tube made of high-quality stainless steel (DN 40 and 1000 mm long) is suitable for wet and dry vacuum cleaners from Kärcher.	☐
Suction tubes, metal				
Suction tube, 2 x, NT, DN 35, 550 mm long, chrome-plated steel, suitable for: NT 27/1, NT 30/1, NT 40/1, NT 50/1, NT 55/1, NT 65/2, NT 75/2	34	2.889-191.0	The suction tube set consists of 2 chrome-plated steel suction tubes for Kärcher wet and dry vacuum cleaners, nominal width DN 35 and each suction tube is 550 mm long.	☐
Suction tube, NT, DN 35, 505 mm long, chrome-plated steel, suitable for: NT 25/1, NT 27/1, NT 30/1, NT 35/1, NT 40/1, NT 48/1, NT 50/1, NT 55/2, NT 65/2, NT 70/2, NT 70/3, NT 72/2, NT 75/1, NT 75/2, NT 611, NT 802 IV	35	6.900-514.0	The suction tube made of chrome-plated steel (DN 35, 505 mm long) is suitable for wet and dry vacuum cleaners from Kärcher.	☐
SUCTION HOSES				
Suction hoses with clip system 2.0 (compatible with vacuum cleaners from model year 2017 on)				
Suction hose, NT, DN 40, length 4 m, electrically conductive, clip 2.0, bayonet 2.0	36	2.889-141.0	The electrically conductive suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	■
Suction hose, NT, DN 35, length 4 m, electrically conductive, clip 2.0, bayonet 2.0	37	2.889-137.0	The electrically conductive suction hose in nominal width DN 35 and with 4 m length is suitable for use with wet and dry vacuum cleaners from Kärcher.	☐
Suction hose, NT, DN 40, length 4 m, clip 2.0, bayonet 2.0	38	2.889-138.0	The suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose, NT, DN 40, length 2.5 m, clip 2.0, bayonet 2.0	39	2.889-139.0	The suction hose in nominal width DN 40 and with 2.5 m length is suitable for use with wet and dry vacuum cleaners from Kärcher.	☐
Suction hose, NT, DN 40, length 4 m, oil-resistant, clip 2.0, bayonet 2.0	40	2.889-140.0	The oil-resistant suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners from Kärcher.	☐
Suction hose, NT, DN 40, length 2.5 m, electrically conductive, clip 2.0, bayonet 2.0	41	2.889-142.0	The electrically conductive suction hose in nominal width DN 40 and with 2.5 m length is suitable for use with wet and dry vacuum cleaners.	☐
Extension hose, NT, DN 40, length 2.5 m, clip 2.0, connecting adapter	42	2.889-146.0	The extension hose in nominal width DN 40 and with 2.5 m length is suitable for use with wet and dry vacuum cleaners from Kärcher.	☐

■ Included in the scope of supply. ☐ Available accessories.

ACCESSORIES FOR NT 65/2 TACT²

1.667-286.0



		Order no.	Description	
SUCTION HOSES				
Suction hoses with clip system 2.0 (compatible with vacuum cleaners from model year 2017 on)				
Repair kit for suction hoses DN 40, Clip 2.0	43	2.889-150.0	Repair kit ID 40 for the new clip system.	☐
Hose connection				
Adapter, ID 32/35, with internal thread	44	6.902-077.0	Electrically non-conductive adapter with internal thread. For connecting two suction hoses without connectors. Suitable for DN 32 or DN 35.	☐
Connecting adapter, ID 40, with internal thread	45	6.900-286.0	Electrically non-conductive adapter with screw thread at both ends. For connecting 2 DN 40 suction hoses without connectors.	☐
Suction hoses with clip system 1.0 (compatible with vacuum cleaners up to model year 2016)				
Repair kit for suction hoses DN 40 Clip 1.0	46	2.639-873.0	Repair set (C40) includes threaded hose adapters (without bayonet adapter) for industrial NT vacuum cleaners with clip system.	☐
Extension hose, NT, DN 40, length 2.5 m, clip 1.0, connecting adapter	47	6.906-344.0	The extension hose in nominal width DN 40 and with 2.5 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose with bend, NT, DN 40, length 4 m, clip 1.0, bayonet 1.0	48	4.440-678.0	The suction hose with bend in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose, NT, DN 40, length 10 m, clip 1.0, bayonet 1.0	49	6.906-279.0	The suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose, NT, DN 40, length 4 m, clip 1.0, bayonet 1.0	50	6.906-321.0	The suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose, NT, DN 40, length 4 m, oil-resistant, clip 1.0, bayonet 1.0	51	6.906-714.0	The oil-resistant suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose with bend and PFC module, NT, DN 40, length 4 m, electrically conductive, clip 1.0, bayonet 1.0	52	4.440-728.0	The electrically conductive suction hose with bend and PFC module in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose, NT, DN 40, length 16 m, clip 1.0, bayonet 1.0	53	6.906-635.0	The suction hose in nominal width DN 40 and with 16 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose, NT, DN 40, length 10 m, electrically conductive, clip 1.0, bayonet 1.0	54	6.906-877.0	The electrically conductive suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hoses with cone connection				
Suction hose, NT, DN 40, length 4 m, cone, bayonet 1.0	55	4.440-263.0	The suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose, NT, DN 40, length 4 m, oil-resistant, cone, bayonet 1.0	56	4.440-303.0	The oil-resistant suction hose in nominal width DN 40 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	☐

☐ Available accessories.

ACCESSORIES FOR NT 65/2 TACT²

1.667-286.0



		Order no.	Description	
SUCTION HOSES				
Suction hoses with cone connection				
Suction hose, NT, DN 40, length 10 m, cone, bayonet 1.0	57	4.440-463.0	The suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose, NT, DN 40, length 10 m, electrically conductive, cone, bayonet 1.0	58	4.440-466.0	The electrically conductive suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose, NT, DN 40, length 10 m, oil-resistant, cone, bayonet 1.0	59	4.440-612.0	The suction hose in nominal width DN 40 and with 10 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose, NT, DN 50, length 4 m, cone, bayonet 1.0	60	4.440-264.0	The suction hose in nominal width DN 50 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose, NT, DN 50, length 3 m, cone, bayonet 1.0	61	4.440-328.0	The suction hose in nominal width DN 50 and with 3 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose, NT, DN 50, length 10 m, cone, bayonet 1.0	62	4.440-467.0	The suction hose in nominal width DN 50 and with 10 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose, NT, DN 50, length 4 m, oil-resistant, cone, bayonet 1.0	63	4.440-613.0	The oil-resistant suction hose in nominal width DN 50 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	☐
Suction hose, NT, DN 50, length 4 m, electrically conductive, cone, bayonet 1.0	64	4.440-616.0	The electrically conductive suction hose in nominal width DN 50 and with 4 m length is suitable for use with wet and dry vacuum cleaners.	☐
FILTER BAGS				
Fleece filter bags				
Fleece filter bags, 5 Piece(s), NT 65, NT 70, NT 72, NT 75, NT 90	65	2.885-753.0	Tear-resistant fleece filter bags of dust class M, suitable for Kärcher wet and dry vacuum cleaners. Contents: 5-pack.	☐
Paper filter bags				
Paper filter bags, 5 Piece(s), NT 48, NT 65, NT 70, NT 72, NT 75, NT 80, WET VAC	66	6.904-285.0	Premium 3-layer paper filter bags of dust class M, suitable for Kärcher wet and dry vacuum cleaners. Contents: 5-pack.	☐
FILTER T/ NT				
Flat pleated filter HEPA, dust class H				
HEPA-14 flat pleated filter	67	6.904-364.0	For Kärcher wet and dry vacuum cleaners: HEPA-14 (H14) flat pleated filter. Suitable for vacuuming hazardous dusts, coarse dirt and liquids.	☐
Wet filter bag				
Wet filter bag	68	6.904-252.0	Approved for dust class L, general cleaning, wet and dry, tear-resistant.	☐
Plastic sacks for dust-free disposal				
Plastic bag for dust-free disposal, 10 Piece(s), NT 65, NT 70, NT 72, NT 75, NT 602, NT 700, NT 702	69	6.900-698.0	PE plastic sack.	☐
Fabric filter				
Candle filter Wood, NT 65/2, NT 75/2	70	2.414-003.0	Wood cartridge filter made from textile material with PTFE coating and a brown label. For safely vacuuming large quantities of wood and fibre dust with the NT 65/2 and 75/2 twin-motor Tact vacuums.	☐

☐ Available accessories.

ACCESSORIES FOR NT 65/2 TACT²

1.667-286.0



		Order no.	Description	
FILTER T/ NT				
Fabric filter				
Membrane filter, NT 65, NT 70, NT 72, NT 75, NT 551, NT 602, NT 700, NT 702, NT 802, NT 993	71	6.904-282.0	Polyester needle fleece membrane/fabric filter – BIA-C -, washable up to 40°C, metal fibres for earthing. Suitable for virtually all industrial two-motor NT vacuum cleaners.	☐
CONNECTING SLEEVES				
Y-adapter kit				
Y-adapter kit	72	2.637-217.0	Plastic distributor – suitable for NT vacuum cleaners.	☐
Connection adapter C ID (clip to cone)				
Adapter clip DN 35 on cone DN 35	73	5.407-005.0	Adapter clip system DN 35 for connecting suction tubes and small nozzles to cone DN 35. Perfect for vehicle interior cleaning, even without the connection of other nozzles.	☐
Adapter clip DN 40 to cone DN 40	74	5.407-006.0	For connecting small nozzles and suction tubes with cone DN 40: Adapter clip system DN 40. Ideal for vehicle interior cleaning tasks, with no need to connect additional nozzles.	☐
Connection adapter C DN 35	75	5.407-112.0	C 35 hose connector for DN 35 accessory, electrically conductive.	☐
Electrically conductive DN 40 connection adapter for DN 35 accessories	76	5.407-109.0	Electrically conductive adapter (C 40) with DN 35 connection for connecting DN 35 accessories to an industrial C 40 or C-DN 40 suction hose. Suitable for NT vacuum cleaners.	☐
Connection adapter C DN 40	77	5.407-111.0	C 40 hose connector for DN 40 accessory, electrically conductive.	☐
Connection adapter for power tools, clip connection				
Power tool connection adapter, DN 26-36, electrically conductive	78	5.453-042.0	3-way plastic adapter. For DN 26 to DN 36. For connecting power tools to an industrial C or C-DN 35 suction hose. Suitable for NT vacuum cleaners.	☐
Connection adapter for power tools, C 35, electrically conductive	79	5.453-048.0	Inside Ø 25.4 mm, outside Ø 34.6 mm/ 38 mm, electrically conductive. Only NT vacuums.	☐
	80	5.453-050.0	Inside Ø 27 mm, outside Ø 36.5 mm/38.8 mm, electrically conductive. Only NT vacuums.	☐
Adapter for electric power tools, screwable				
Adapter for electric power tools, screwable, ID 35	81	5.453-016.0	3-way plastic adapter with fitting instructions. For DN 26 to DN 36. For connecting to an industrial DN 35 suction hose.	☐
	82	5.453-026.0	Inside Ø 28.6 mm, outside Ø 37.3/38.8 mm.	☐
	83	6.902-059.0	Electrically conductive power tool adapter, threaded. Internal diameter: 32 mm.External diameter: 39 mm.	☐
	84	6.902-095.0	2-way power tool adapter, threaded. For connecting to an industrial DN 35 suction hose. Internal diameter: 28 mm.External diameter: 34 mm and 38.8 mmSuitable for NT vacuum cleaners.	☐

☐ Available accessories.

ACCESSORIES FOR NT 65/2 TACT²

1.667-286.0



		Order no.	Description	
CONNECTING SLEEVES				
Reducing sleeves				
NT reducer from DN 40 to DN 35, electrically conductive	85	5.407-108.0	Threaded reducer - from C-40 to DN 35. Suitable for NT vacuum cleaners.	☐
Reducer adapter from DN 40 to DN 35	86	6.902-017.0	Reducer, enabling accessories (upholstery nozzle, crevice nozzle, etc.) with a DN 35 connection adapter to be connected to accessory parts (bend or suction tube) that have a DN 40 connection adapter.	☐
NT reduction bushing with clip system for DN 40 suction hoses on accessory DN 35	87	5.407-113.0	Reducer (C 40 to C 35) for connecting accessories with C-35 clip connection to suction hoses with C 40 clip system.	☐
Reducer from ID 35 to ID 32	88	6.902-072.0	Reducer with internal connecting cone DN 32. Ideal for accessories from the industrial vacuum cleaner range in combination with industrial NT vacuum cleaners.	☐
Reduction/expansion adapter kit				
Set of reducers / adapter sleeves	89	2.860-117.0	DN 40/35, DN 35/32 (tube -> nozzle), plastic.	☐
TARGET-GROUP-SPECIFIC ACCESSORY KITS FOR VACUUM CLEANERS				
Wet and dry vacuuming kit, ID 40, electrically conductive	90	2.638-147.0	Wet and dry vacuum cleaner set with electrically conductive design, with nominal size 40.	☐
Car cleaning accessory kit	91	2.862-166.0	Vehicle interior cleaning accessory kit in nominal width DN 35 for Kärcher wet and dry vacuum cleaners. The kit comprises various nozzles and adapter pieces in nominal widths DN 35 and DN 40.	☐
OTHER ACCESSORIES NT				
Cyclone preseparator CS 40 Me	92	2.863-026.0	The highly efficient CS 40 Me cyclone preseparator for all Kärcher wet and dry vacuum cleaners is a specially designed accessory for fine dust applications on construction sites or in industry.	☐
Adapter for NT hoses with bayonet connection 1.0	93	5.031-436.0	Electroconductive adapter for connecting NT hoses with bayonet 1.0 connection of nominal widths DN 35, 40, 50 to the new accessory system for wet and dry vacuum cleaners from Kärcher.	☐
MODIFICATION KIT, NON-CONDUCTIVE MEDIA				
Attachment kit, non-conductive media Tact ² + Ap	94	2.642-602.0	For switching off when vacuuming non-conductive fluids such as oils and greases	☐
OTHER ACCESSORIES SCRUBBER DRIERS				
Miscellaneous				
Extension cable	95	6.647-022.0	Extension cable, 20 m, 3x1.5 mm². With splash-proof earthing pin plug, strain relief and anti-kink sleeve.	☐
EMPTYING SUPPORTS				
Strainer baskets				
Sieve basket IVC	96	5.731-645.0	Plastic swarf sieve, perforated, with internal thread. For protecting the drain hose against very abrasive suction material such as coarse shavings.	☐

☐ Available accessories.